



# JFDM9 Manifold

## JFDM9

Pre-assembled UFH Distribution Manifold  
Forged Brass Body

### Introduction

1" pre-assembled distribution manifold, consisting of: Control valves with handle, set up to fit thermo-electric heads. With flow regulating valves. PEX fittings or multilayer fittings inlet and outlet. Equipped with 2 automatic air vent valves and 2 drain valves (with blue/red handles)

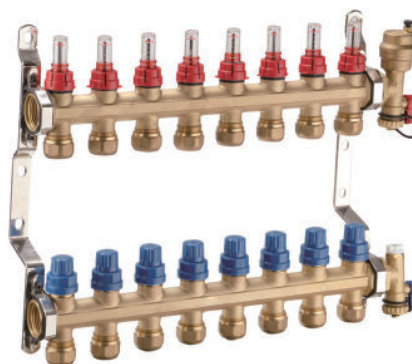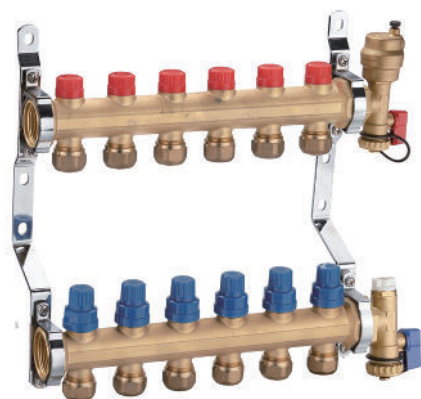

### Material of Main Parts

Part Name	Material	Surface Treatment
Manifold Body	Brass	Natural Color
Flow Regulating Valve Bonnet	Brass	Natural Color
Control Valve Bonnet	Brass	Natural Color
Control Valve Spindle	SS304	
End Components	Brass	Natural Color
Fitting	Brass	Natural Color
Rubber Parts	EPDM	

## Technical Parameter

Medium	Water with Corrosion Inhibitors Present
Maximum Working Pressure	10 bar
Apply Water Temperature	0-82°C (short term at Max. 105°C)
Connection Spec.	1F×3/4M, 1.1/4F×3/4M
Distance Between Branches	50mm
Distance Between Manifolds	215mm
Fittings	16×2, 20×2

Code	Number of Branches	DN	D (mm)	L (mm)	C (mm)
JFDM902	2	25	G1"	198	N/A
JFDM903	3	25	G1"	248	50
JFDM904	4	25	G1"	298	100
JFDM905	5	25	G1"	348	150
JFDM906	6	25	G1"	398	200
JFDM903	3	32	G1.1/4"	240	50
JFDM904	4	32	G1.1/4"	290	100
JFDM905	5	32	G1.1/4"	340	150
JFDM906	6	32	G1.1/4"	403	213
JFDM907	7	32	G1.1/4"	453	263
JFDM908	8	32	G1.1/4"	503	313
JFDM909	9	32	G1.1/4"	553	363

